

Model : L-125(Longest 6240)

Voltage : 6V

Material : Polypropylene

Battery : Deep Cycle Flooded type

Color : Dark Blue




Product Physical Specifications


BCI	Model	Voltage (V)	Dimension (mm)				Quantity(Liters)	Weight(kg)
			Length	Width	Height	Total Height	Electrolyte	Battery
GC2	L-125	6	259	179	245	278	5.4	30.0

Electrical Specifications




Type	Capacity Minutes		Capacity Amp-Hours(AH)				Energy(KWh)
	@25 Amps	@75 Amps	@5Hr	@10Hr	@20Hr	@100Hr	
L-125	488	132	195	221	240	266	1.60

Terminal Configurations



EHPT	Embedded High Profile Terminal
	Terminal Height mm(Inches) 38(1.50) Torque Value in-lb(Nm) 95-105(11-12) Bolt 5/16"

EAPT	Embedded Automotive Post Terminal
	Terminal Height mm(Inches) 24(0.95) Torque Value in-lb (Nm) 50 - 70(5.6 - 7.9)


Battery Dimensions

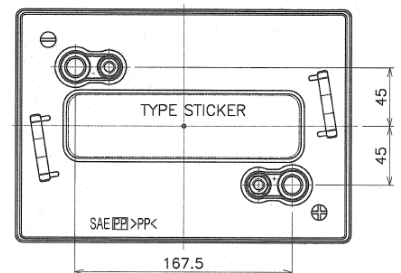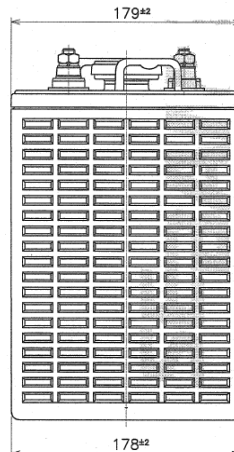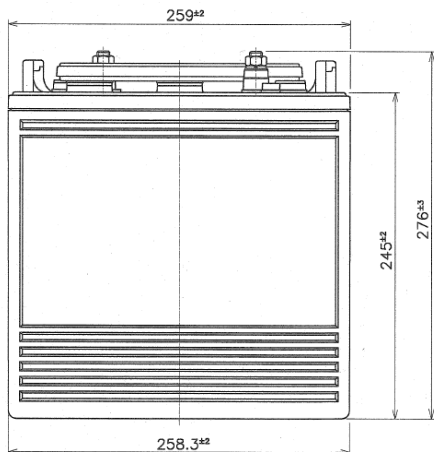


Self Discharge Data

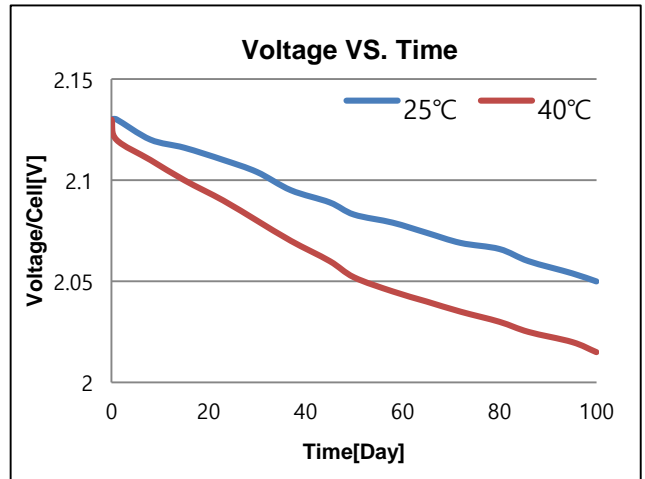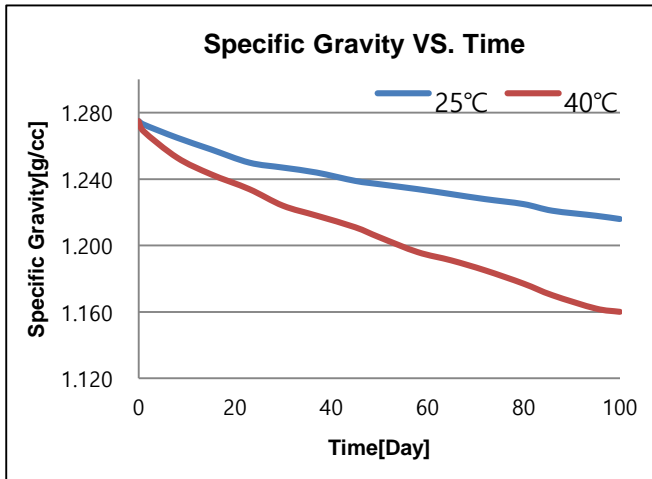

Capacity By Discharge Current

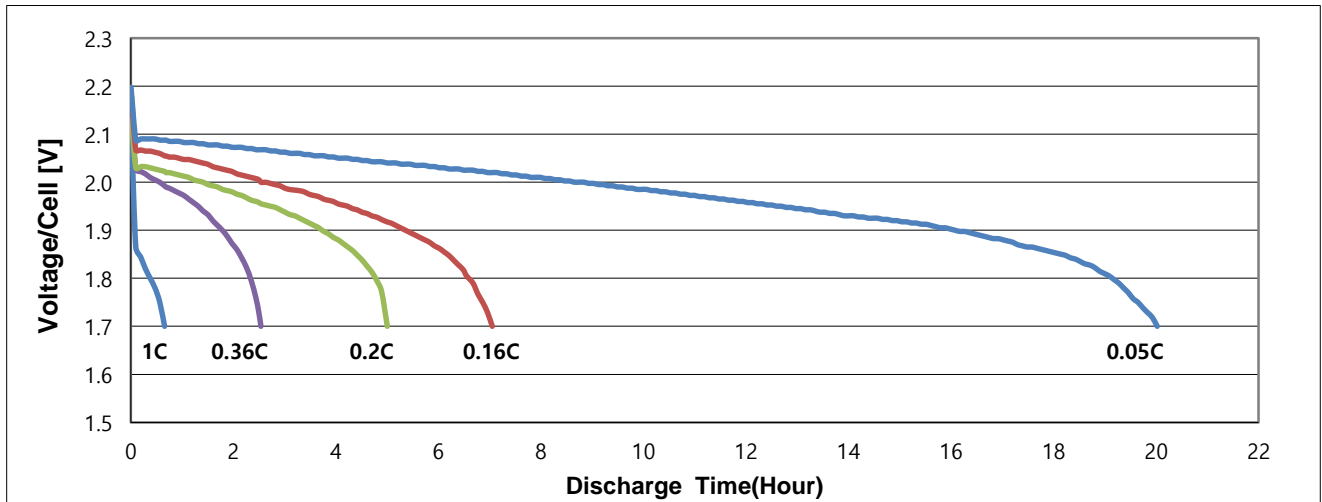

Cycle Service Life : BCIS-06 [DOD 100% _ 27°C]

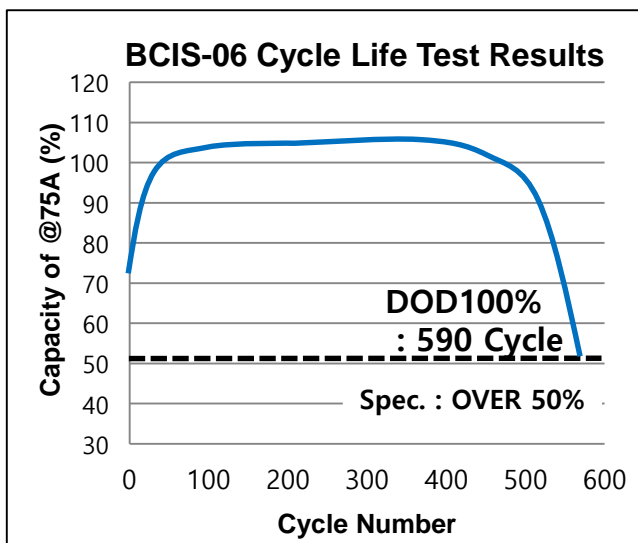

Depth of Discharge(DOD) & Cycle Number

